



Set your lighting using
the Lightpro NXT app

The steps

1. Download the app
2. Creating an account
3. Creating a network
4. Adding a product
5. Creating a zone
6. Setting a timer
7. Setting the dark/light sensor

Download the app



Visit the App Store or Play Store to download the Lightpro app.

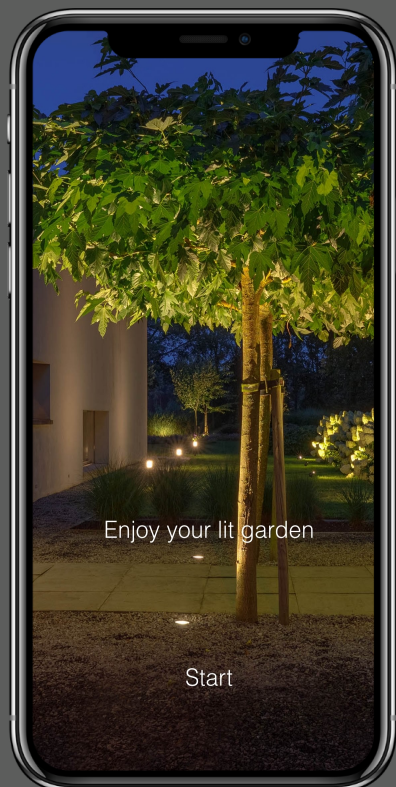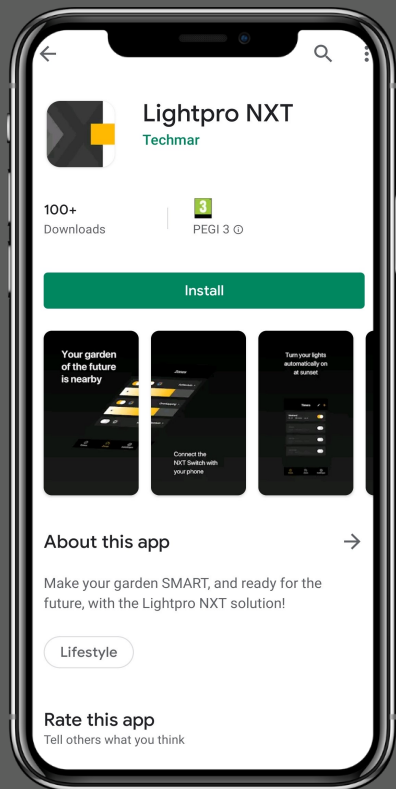

Has the app been installed on your your phone? Then you can start right away.

Creating an account



On the start screen you can select how you would like to create an account.

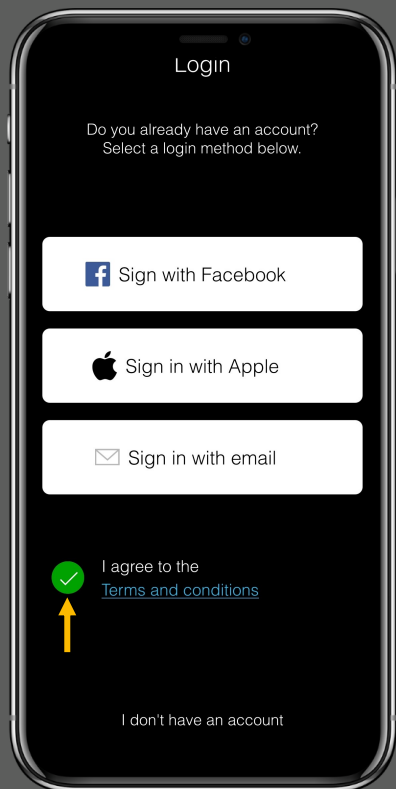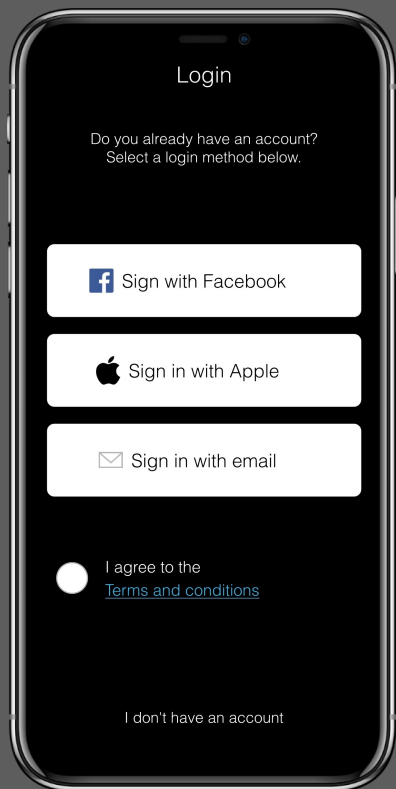

Click on 'I agree to the terms and conditions' and the service you would like to use to create an account.

Creating an account

Select 'New network'. A pop-up concerning location access will appear which has to be accepted for the app to work correctly.

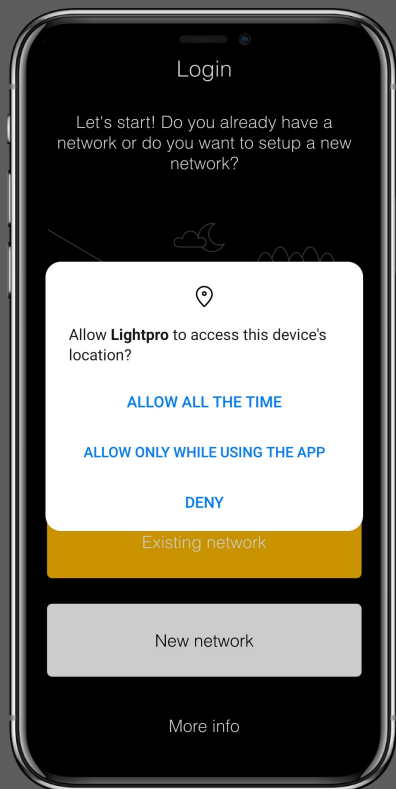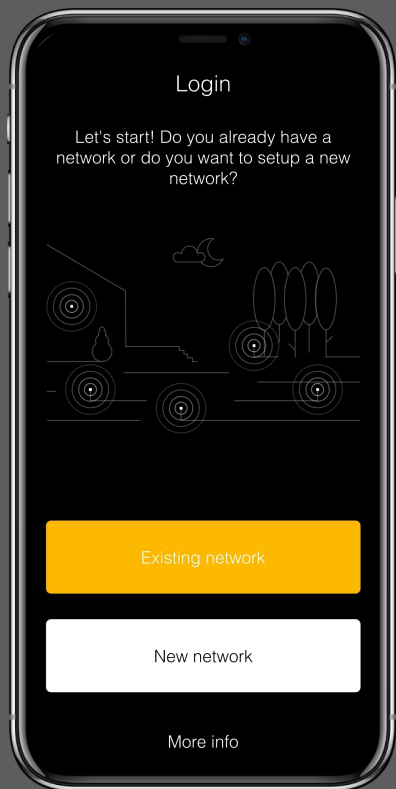


If you accidentally clicked "Deny" you can still change this in your phone's settings.




Create a password by submitting the same password twice and click on 'Connect'.

As soon as you click 'Connect' the app will start searching for available devices set to factory settings.


Caution! In order to create a network, the smart products must be connected to a power source by means of a transformer.

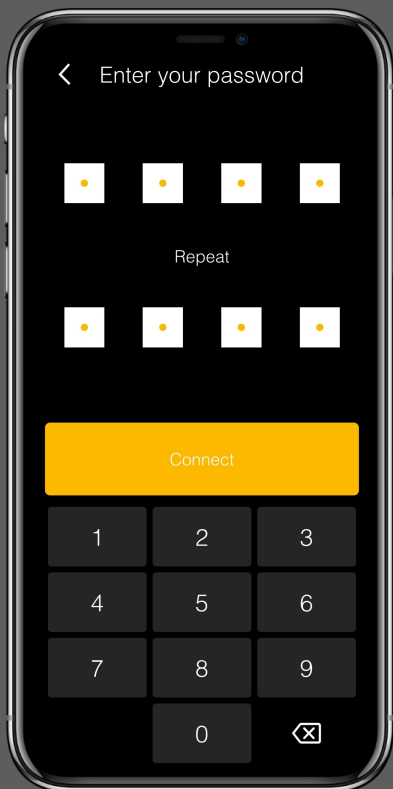

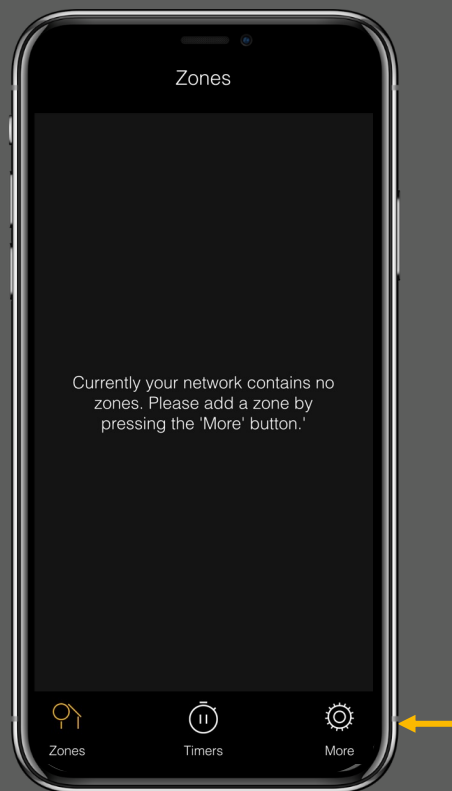

Once the app connects to devices in your garden you will see the start screen of your zones.

First, click on 'More' and subsequently on 'Edit product' to assign a name your smart products.

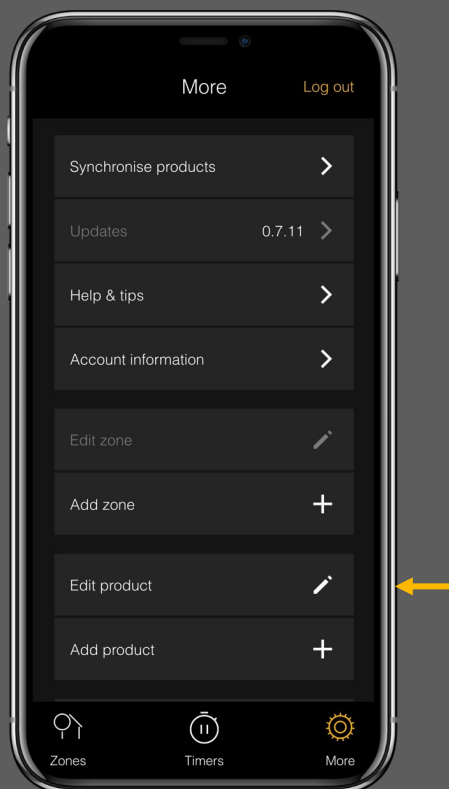




At 'Edit products' you will find all smart products to which the app is connected.

In order to name the Switch, click on the arrow to the right of the standard name assigned to the product.

A screen will open that shows you information about the product.

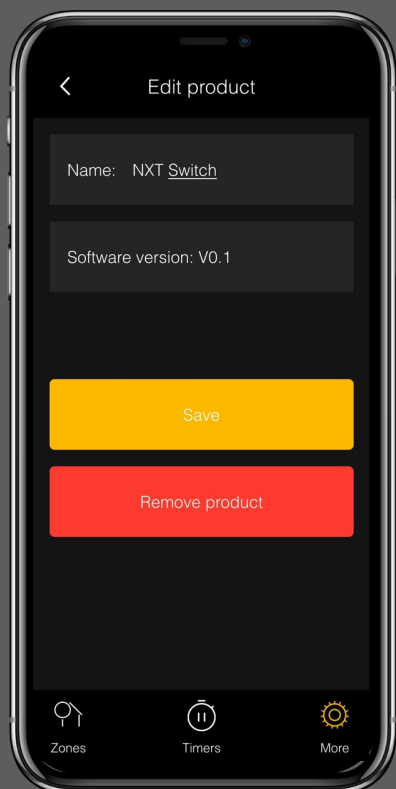



Click on the standard name to change it. Subsequently, select 'Save' to save the new name.

**If you have an Android phone you must click enter on your keyboard first before you select 'Save'.*

Adding a product

Click on 'Add product' and subsequently on 'Connect'. The app will start searching for available smart products.



Consult the user manual if your product cannot be found in order to reset the product to factory settings.

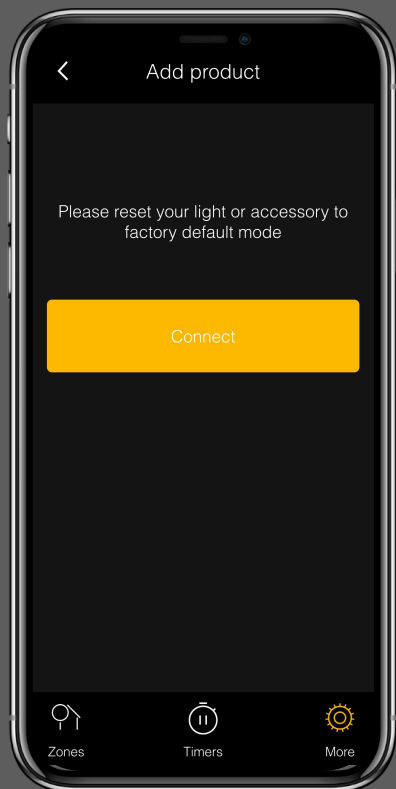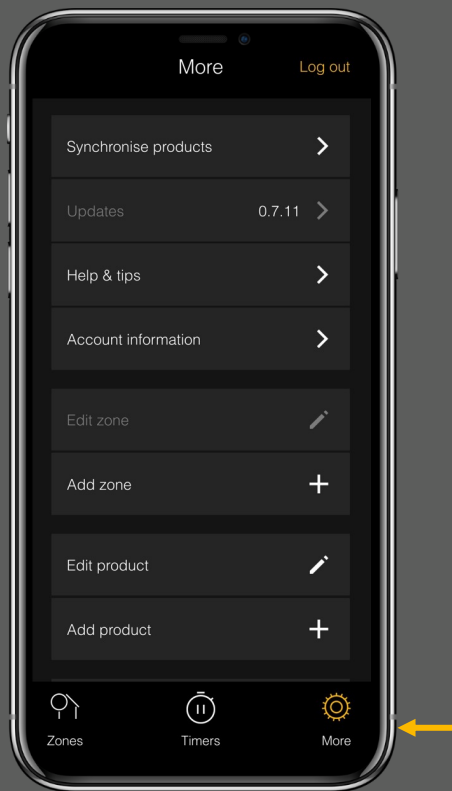


Creating a zone

In order to control a product it should be linked to a zone.

You can create a zone by selecting 'Add zone' in the main menu. In the first field, submit the name you want to assign to the zone.

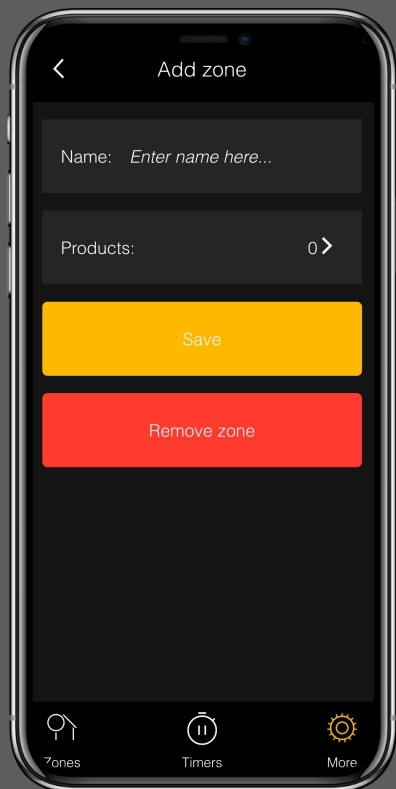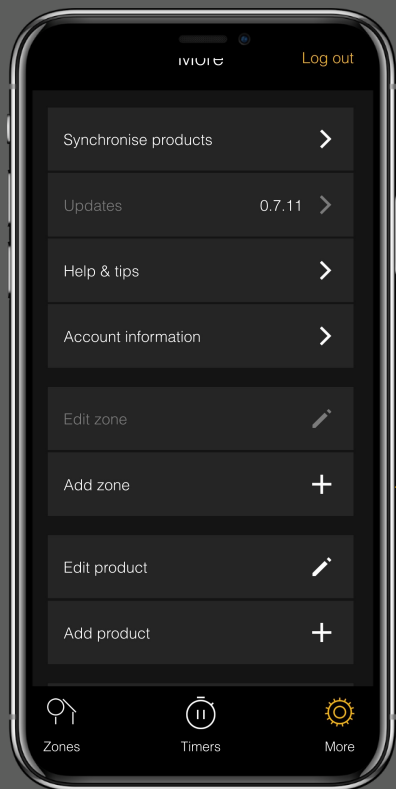


Click on the arrow to the right of 'Products' to link products to the zone.

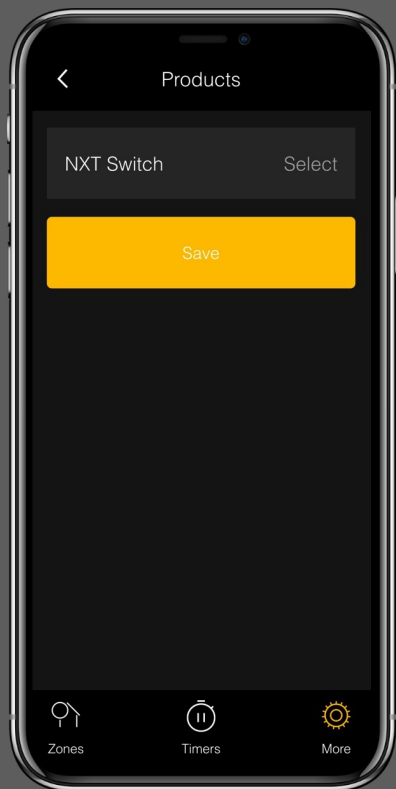


On this new screen you can select the products you want to link to the zone.

Click on 'Select' in the grey next to the product you want to link.

The text will change to 'Selected'. Subsequently click 'Save'.

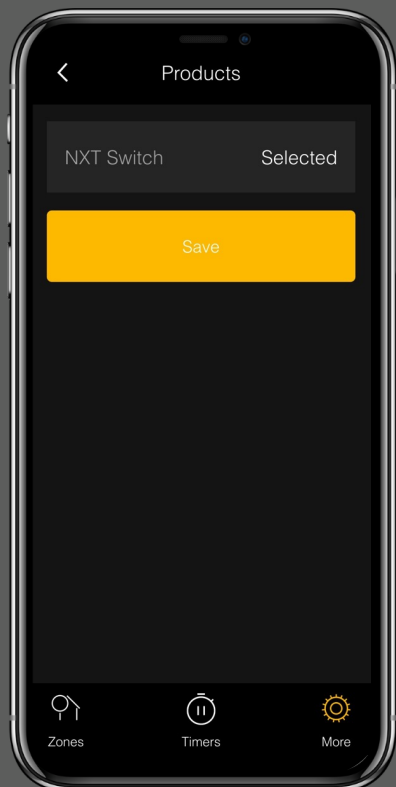

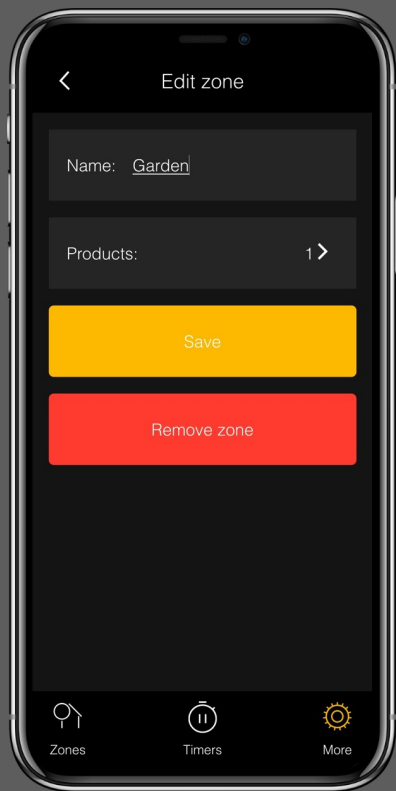

Once you clicked 'Save' you will return to the zone. At 'Products' you can now view all the products that have been linked to the zone. Now, click on 'Save' again if the correct products have been linked successfully.

By clicking on 'Zones' in the lower left corner of your screen you can see all your zones and turn them on/off. The zone is turned on when the slide is yellow. You can turn it off by clicking on the slide, which will then turn grey.




The text will change to 'Selected'. Subsequently click 'Save'.




Setting a timer

Click on 'Timers' at the bottom of the screen and then on the plus sign to set a new timer.

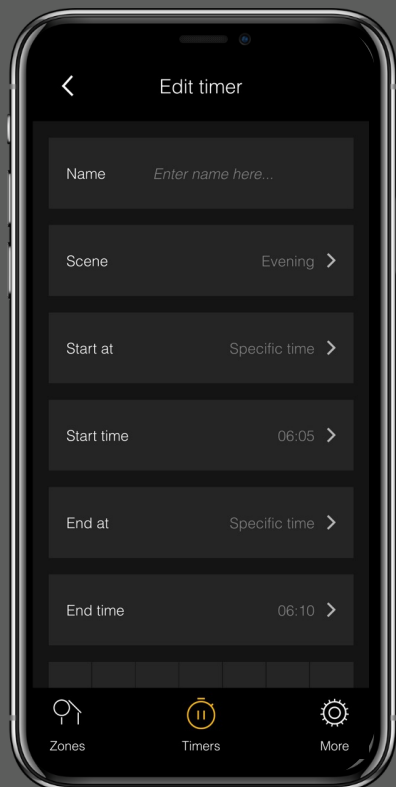

A new screen will open where the timer can be set.

Work from top to bottom and click on the arrows to access and adjust a field.

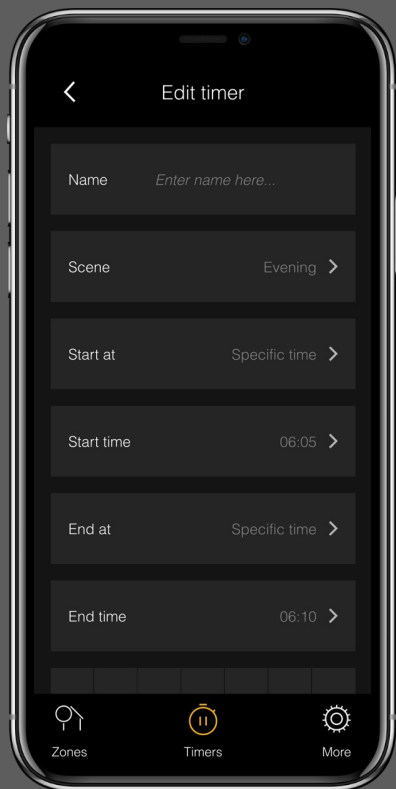


Click on the arrow at 'Scene' to select a scene. A new screen will open where the scene can be selected.

Click on the scene and you will automatically return to the screen where you can set the timer.

Next to 'Scene' you will see the name of the selected scene in grey



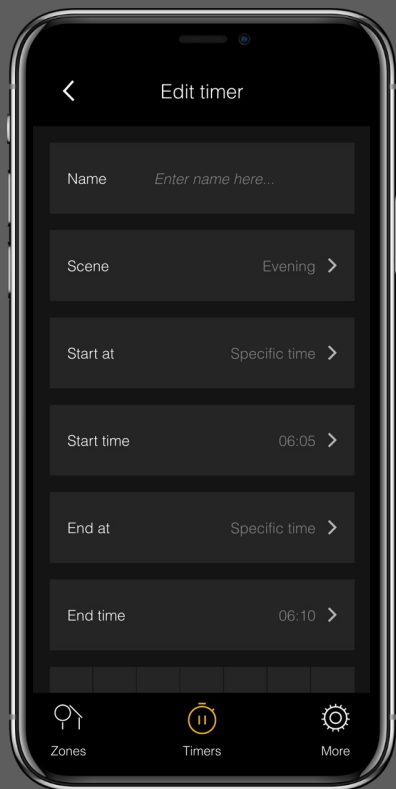


Click on the arrow behind the start time or end time to set at what time the lamps should go on and off.

A new screen will open where you can set these time preferences.

Click on 'Select' to save the time you entered.




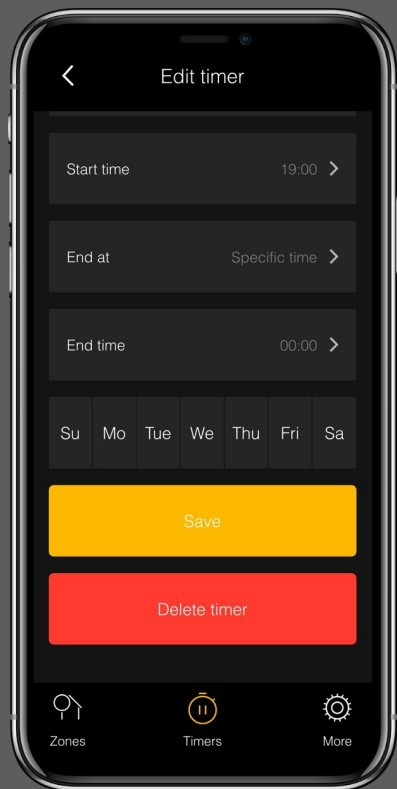

When you scroll down you will see for which days your timer has been set.


You can remove days from this selection by clicking on them. The selected days will then turn dark.

Click on 'Save' to save the timer.

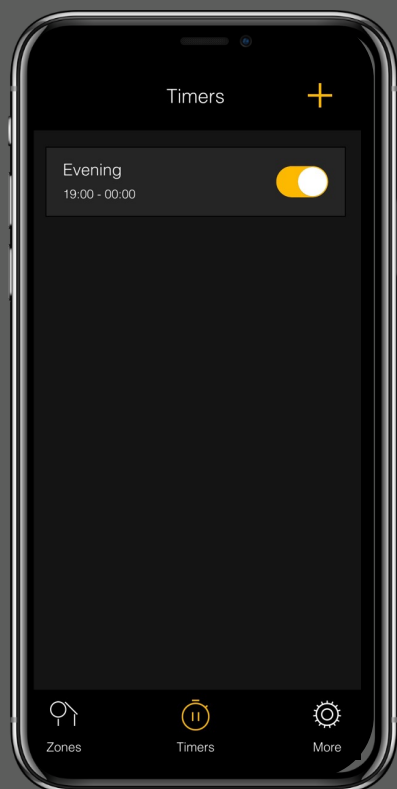

You can now see the timer in the overview.

Here you can activate or (temporarily) deactivate it by clicking on the slide.

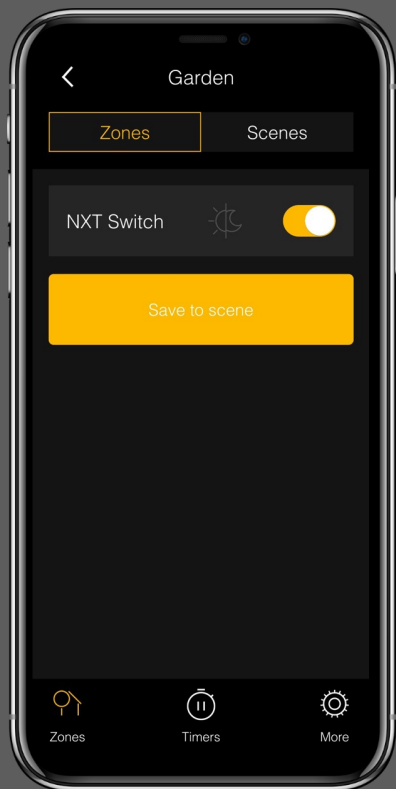


Setting the dark/light sensor

Go to 'Zones' in the lower left corner of the screen and open the zone to which the NXT Switch you want to use is connected.

Here you will see an icon of a sun and a moon in dark grey which represents the dark/light sensor.

By clicking on the icon it turns yellow and the sensor has been activated. When it gets dark or light, the switch now automatically activates or deactivates.

Caution! You cannot activate the sensor and use a set timer at the same time.

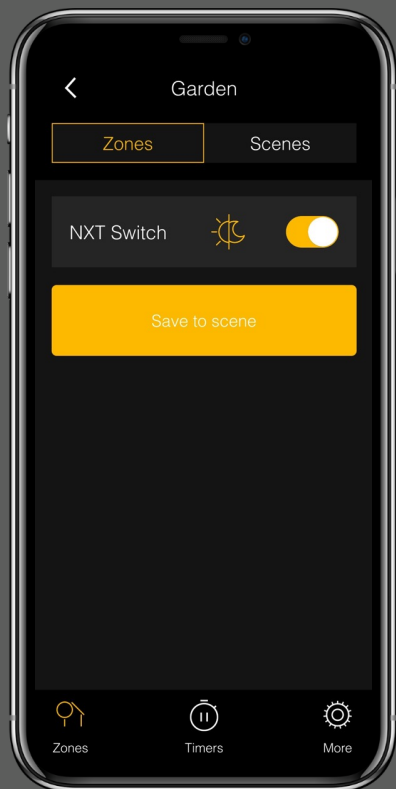

If you have any questions
please contact us at:

info@techmar.com

+31 884344517